

# Nio

DIGITAL SIGNAGE

**The all-new  
Nio Digital Signage  
display with  
onboard Android 11**

Big viewing experience

Beautiful picture

Even, minimal bezel

Integrated Android



Integrated software options



<b>Product Features</b>	Three USB Ports (USB 2.0 x1, USB 3.0 x1, USB-C x1) Physical buttons Built-in speaker 4k UI	Hidden remote reception Supports landscape and portrait mode Anti-glare panel
<b>Display</b>	<b>Size:</b> 75" <b>Panel Type:</b> ADS <b>Response Time:</b> 8 ms <b>Aspect Ratio:</b> 16:9 <b>Display Area:</b> 1649.664(H) × 927.936(V) <b>Resolution:</b> 3840(H)×2160(V) <b>Pixel Pitch:</b> 0.4296mm(H) × 0.4296 mm(V) <b>Refreshing Frequency:</b> 60Hz <b>Display Color:</b> 1.07B (10 bit)	<b>NTSC:</b> 62% <b>Contrast Ratio:</b> 1200:1 <b>Viewing Angle:</b> 178° (H/V) <b>Brightness with glass (min):</b> 400 cd/m2 <b>Brightness with glass (typ):</b> 450 cd/m2 <b>Lifetime:</b> ≥ 50,000 Hours <b>Back Light Unit:</b> DLED <b>High Haze:</b> Yes, Haze 25% <b>Operation Time:</b> 7 Days x 16 hr
<b>Display OS</b>	<b>System Version:</b> Android 11 <b>CPU:</b> A55*4 <b>GPU:</b> Mali-G51MP2	<b>RAM:</b> 4GB <b>ROM:</b> 32GB
<b>Audio</b>	<b>Sound Channel:</b> 2.0	<b>Output Power:</b> 2 × 10W
<b>Power</b>	<b>Power Requirements:</b> 100-240V~ 50/60Hz <b>Standby Power:</b> ≤0.5W	<b>Overall Power (standard):</b> 235W <b>Overall Power (max):</b> 425W
<b>Display Connections</b>	<b>HDMI Input:</b> 3 <b>HDMI Output:</b> 1 <b>USB 2.0:</b> 1 <b>USB 3.0:</b> 1 <b>USB-C:</b> 1 (DP1.2, PD 65W, Network Sharing(100M))	<b>Coaxial/Optical Output:</b> Optical (SPDIF) 1 <b>Audio Output:</b> 1, 3.5mm <b>RS232 Port:</b> 1 <b>RJ45:</b> 2 (IN/OUT)
<b>Physical Specifications</b>	<b>Dimension L*H*D:</b> 1685.6 × 963.7 × 81.6 mm / 66.36" × 37.94" × 3.21" <b>Package Dimension L*W*H:</b> 1863×225×1090mm / 73.35" × 8.86" × 42.9" <b>Bezel Width:</b> 15.9mm	<b>Net Weight:</b> 34.7 kg / 76.5 lbs <b>Gross Weight:</b> 48.2 kg / 106.26 lbs <b>Machine &amp; Wall Mount Thickness:</b> 101.4mm / 3.99" <b>Wall-hanging Screw Spec:</b> M8*25mm <b>VESA:</b> 800x400mm
<b>Accessories</b>	<b>American Standard Power Cord</b> x1	<b>Remote Control</b> x1
<b>Environmental Conditions</b>	<b>Operation Temperature:</b> 0°C~40°C / 32°F~104°F <b>Operation Humidity:</b> 10%~90%	<b>Storage Temperature:</b> -20°C~60°C / -4°F~140°F <b>Storage Humidity:</b> 10%~90% <b>Altitude:</b> Below 5000m / 16404.2 ft
<b>Integrated Software</b>	<b>Clear Touch Command™:</b> Remote access to the display for power saving schedules, emergency messaging and usage statistics	<b>Clear Touch Collage™:</b> Seamless screen mirror/casting to the panel from multiple devices <b>Clear Digital Sho™:</b> Web content management for digital signage

**Module** (Wireless) Compatible with: CTI-WFMOD-DBAX

(PC) Compatible with: CTI-PCOPS-PC15SM

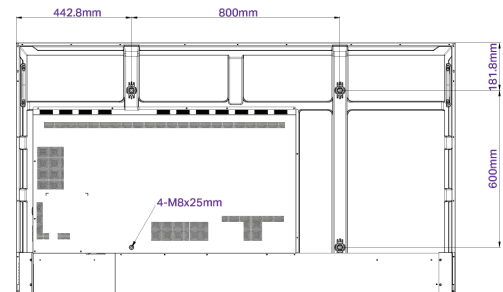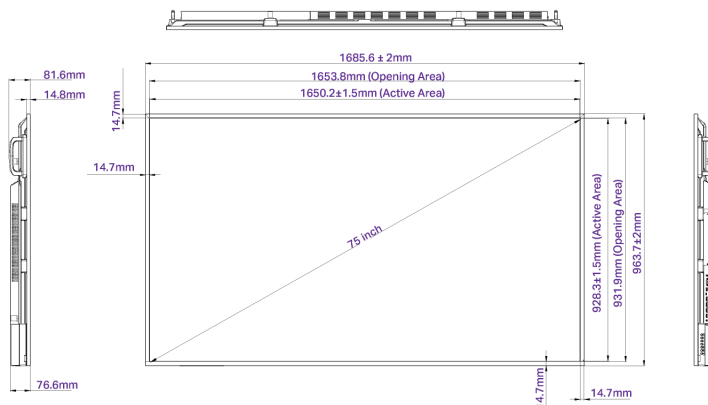

Contact a Clear Touch Sales Representative for pricing or a demo:  
**828-DIGITAL** | [getcleardigital.com/demo](http://getcleardigital.com/demo)